

Uniden®

BTSC1100

Bluetooth® Car Kit


For more exciting new products please visit our website:

Australia: www.uniden.com.au

New Zealand: www.uniden.co.nz

OWNER'S MANUAL


What's in the box?

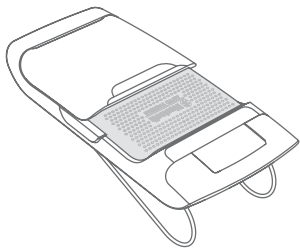

BTSC1100




Owners
Manual




AC Adapter
(AAD1500)

Optional

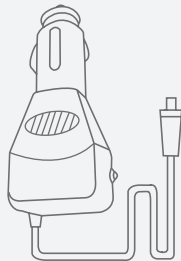

12VDC - 24VDC
DC (car) power
adapter
(CL1500)

Getting to Know the BTSC1100

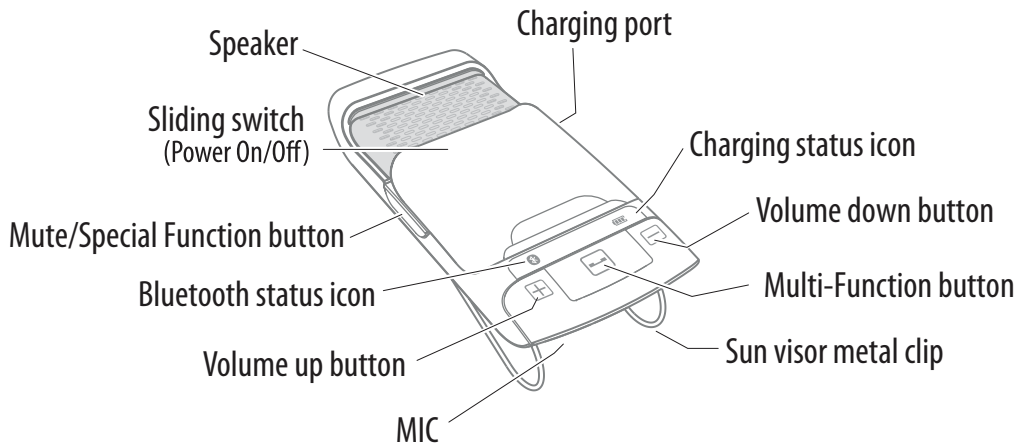

LED (Status Icon) and Tone Indicators

Status	Icon Indication
Power On	Bluetooth Status Icon blinks 3 times
Pairing Mode	Bluetooth Status Icon blinks repeatedly
Connectable Mode	Bluetooth Status Icon blinks 1 time every 5 seconds
Connected Mode	Bluetooth Status Icon blinks 2 times every 5 seconds
While Calling	Bluetooth Status Icon blinks 3 times every 5 seconds

Status	Beep Indication
Power On	Turn-on Melody (no connection), Turn-on Melody + 2 short beeps (easy pairing mode)
When connected	2 Short beeps
Incoming Call	Melody
Active call	2 Rising Beeps
Ending Call	2 Falling Beeps
Low Battery	Alert Melody every 30 seconds

Charge the Battery

Before using the unit, charge the battery for at least 3 hours.

Charging the battery completely (and keeping it charged) will help you get the longest possible talk and standby time out of the battery. On average, the battery provides about 10 hours of talk time and about 400 hours of standby time.


Connect an adapter to the power connector on the side of the BTSC1100 and plug it into any standard; i) 12VDC-24VDC (DC adaptor), or ii) 240VAC (AC adaptor) power outlet.

When charging is completed, the Charging status icon is turned off .

[Note] *Use only the power adapter supplied with the unit. Using any other adapter could damage your unit, create a fire hazard, or cause a risk of electric shock.*

► Low Battery Warning

When the battery requires charging, the unit beeps every 20 seconds. The unit will power off unless charged within approximately 10 minutes.

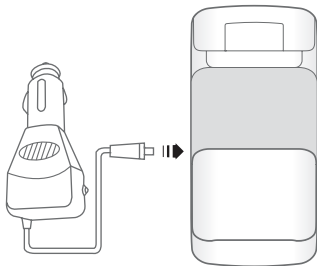



Pair your Phone to the BTSC1100

Power On/Off


- ▶ Slide the cover up to turn power on, slide the cover down to turn power off.

Pairing

Before using the car kit, it must be paired with a mobile phone first.

- 1) Slide the cover up to turn power on.
- 2) Press and hold the Multi-Function button  for 3 seconds until the Bluetooth status icon  flashes constantly.
- 3) On your phone, start a search for Hands-free devices (This process may take several seconds, and it will be different for each mobile phone: see your phone's owner's manual for detailed instruction).
- 4) Your phone should discover a device. When your phone asks if you want to pair with this device, answer Yes.
- 5) Enter PIN number "0000" (4 zeros).

► **Automatic Connection**

This unit supports Auto-Connection which makes it possible to be automatically connected to the last connected device after turn on. To manually reconnect, press the Multi-function button  momentarily.

► **Easy Pairing:** This unit goes into the Pairing Mode automatically when it is turned on for the first time.

► **Simple Pairing:** You can pair this unit with your mobile phone without entering the pin number(0000), if your mobile phone supports Bluetooth version 2.1.

Make and Receive Calls

Making a Call

1) To dial the last number;

Press the Multi-Function button .

2) To voice dial;

Press the Multi-Function button  for 2 seconds.

Voice Dialing is activated on the phone. When you hear a beep, you can use any command you

have already programmed into your phone. If you want to cancel Voice Dialing, press the Multi-Function button  during the Voice Dial Mode.

[Note] Please make sure that your phone supports the Voice Recognition first (See your phone's owner's manual for detailed instructions)


Answering a Call

Press the Multi-Function button  while the call is ringing.


Rejecting an Incoming Call

Press and hold the Multi-Function button  for 2 seconds until you hear a beep.

Ending a Call

Press the Multi-Function button  momentarily during the call or just press the "End" button on the mobile phone.

Transferring a Call

To transfer a call from the unit to your mobile phone and vice versa, press the Multi-Function button  on the Hands-Free Unit during the call for 2 seconds.

Adjusting the Volume

You can adjust the Volume by pressing the Volume Up(+) or Down(-) button.

MIC Mute

Press the Mute/Special Function button momentarily, during a call, to activate or deactivate the MIC Mute. A beep sounds every 10 seconds when MIC Mute is on.

Call Waiting

To use this feature, you must subscribe to Call Waiting through your service provider, and your phone must support the hands-free profile. When another call comes in while you are talking on the phone, this unit sounds a tone.

- 1) To put your current call on hold and switch to the waiting call, press and hold Volume Up(+) for about 3 seconds. When you release the button, you'll be connected to the waiting call. When you want to switch back to the current call, press and hold volume up again for 3 seconds.
- 2) To hang up your current call and switch to the waiting call, press and hold Volume Down(-) for about 2 seconds. When you release the button, you'll be connected to the waiting call.

[Recommended] *Alternatively, press the "SEND" button of your mobile phone to activate the Call Waiting function.*

[Note] *Some features may not be compatible with certain mobile phones.*

Pairing a Second Bluetooth Device

The unit supports simultaneous connection with 2 mobile phones with full control of each unit. Just pair the BTSC1100 to the first phone following the instructions on page 6. When the first phone is successfully paired, pair the BTSC1100 to the second phone.

[Note] *This feature may not be compatible with certain mobile phones.*

1) Multi-point Connect

- ▶ When the BTSC1100 is turned on it will seek simultaneous connection with the 2 mobiles phones.

2) Making a call [via the second mobile phone]

- ▶ Press the Mute/Special function button for last call-redialing from the second mobile phone.
- ▶ Press the Mute/Special function button for 2 seconds until you hear a beep sound. Voice Dialing is activated on the second phone.

[Note] *Making a call via the first mobile phones, please follow the same instruction as described on “MAKING A CALL”.*

- 3) Receiving a call - You can hear the ring tones from the unit when incoming call. Press the Multi-Function button  to receive call.
-

[Note] *Each mobile phone plays different ring tones. When you are on the line, the link with the other phone will be disconnected. But it will be automatically re-connected when you terminate the call.*

Resetting your BTSC1100

If you are having some trouble with this unit or you want to delete all your information (paired device information, etc.), you can reset it. Press and hold Volume Up(+) and Volume Down(-) for about 5 seconds.

[Note] *Resetting is only possible when in standby mode after disconnecting with your mobile phones.*

SAFETY AND GENERAL INFORMATION

- 1) Please read this manual carefully and follow the instruction.
- 2) To avoid damage or malfunction of the unit, do not drop it from a high place.

- 3) Keep the unit away from humidity, water and any other liquid. If the unit is exposed by water, moisture or other liquid directly, then do not operate it to avoid electrical shock, explosion and damage to the unit.
- 4) Do not place or keep the unit near heat sources such as direct sunlight, radiators, stoves or other apparatus which produce heat. It may cause explosion, degrade performance and reduce battery life.
- 5) Do not modify, repair & disassemble the unit (especially the battery).
- 6) Do not place heavy objects on the unit.
- 7) Use only the supplied and approved charger.
- 8) Replacement or service must be done at a qualified service centre or manufacturer.
- 9) Unplug this unit when unused for long periods of time or during lightning storms.

[CAUTION] *ELECTRIC SHOCK HAZARD*

The battery used in this device may present a risk of fire or chemical burn if mis-treated.

Specifications

Model Name	BTSC1100
Bluetooth Core Spec	Bluetooth Specification V2.1+EDR
Profile	Headset, Hands-free
Carrier Frequency	2402 MHz to 2480 MHz
Audio Output	1 W(8Ω)
Modulation Method	GFSK, 1Mbps, 0.5BT Gaussian
Maximum Data Rate	Asynchronous: 2178.1kbps / 177.1kbps
	Synchronous: 1306.9kbps / 1306.9kbps
Bluetooth Class	Class 2
Hopping	1600hops / sec, 1MHz Channel Space
Transmit Power	1 dBm
Coverage Range	10 Metres

Specifications	
Receiver Sensitivity	-80 dBm / 0.1% BER
Continuous Talk Time	10 Hours
Stand-by Time	400 Hours
Weight	65g
Dimension	51.2 mm (W) X 112.9 mm (H) X 15.7 mm (D)
Charging Voltage	DC 5.0V
Charging Time	MAX 3 Hours
Operating Temperature	-20° to +70°C
Storage Temperature	-40° to +85°C
Battery Lithium Polymer	3.7V 600mAH

WARRANTY

Two Year Limited Warranty

UNIDEN BTSC1100

IMPORTANT Evidence of the original purchase is required for warranty service.

Warrantor: Uniden Australia Pty Limited ABN 58 001 865 498
Uniden New Zealand Limited

Elements of Warranty: Uniden warrants to the original retail owner for the duration of this warranty its BTSC1100 (hereinafter referred to as the Product), to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below.

Warranty Duration: This warranty to the original retail owner only is only valid in the original country of purchase and shall be of no further effect 2 years after the date of original retail sale. This warranty will be deemed invalid if the Product is: (A) Damaged or not maintained as reasonable and necessary, (B) Modified, altered or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) Improperly installed, (D) Repaired by someone other than an authorized Uniden Repair Agent for a defect or malfunction covered by this warranty, (E) Used in conjunction with any equipment or parts or as a part of a system not manufactured by Uniden. (F) Only available in the original country of sale.

Parts Covered: This warranty covers for two (2) years, the Product and included accessories.

Statement of Remedy: In the event that the Product does not conform to this warranty at any time while this warranty is in effect, the warrantor, at its discretion, will repair the defect or replace the Product and return it to you without charge for parts and service. This warranty does not provide for reimbursement or payment of incidental or consequential damages. This EXPRESS WARRANTY is in addition to and does not in any way affect your rights under the TRADE PRACTICES ACT 1974 (Cth) (Australia) or the CONSUMER GUARANTEES ACT (New Zealand).

Procedure for obtaining performance or warranty: in the event that the Product does not conform to this warranty, the Product should be shipped or delivered, freight prepaid, with evidence of original purchase (e.g. a copy of the sales docket) to the warrantor at

UNIDEN AUSTRALIA PTY LTD

Service Division
345 Princes Highway,
Rockdale, NSW 2216
Fax (02) 9599 3278
www.uniden.com.au

UNIDEN NEW ZEALAND LTD

Service Division
150 Harris Road, East Tamaki,
Manukau 2013
Fax (09) 274 4253
www.uniden.co.nz

Uniden[®]

© 2010 Uniden Australia Pty Ltd/Uniden New Zealand Limited
Printed in PRC